

## SMART PRESSURE TRANSMITTER

For Differential/Gauge/Absolute/High Pressure Measurement



### Application Areas:

*Nuclear  
Water & Wastewater  
Chemicals  
Petrochemical  
Oil & Gas  
Pulp & Paper  
Food & Beverage,  
Pharmaceutical  
Power  
Renewable Energy  
Alternate Fuel*



**Autrol America Inc,**  
10 N. Martingale Rd, Suite 400.  
Schaumburg, IL 60173. United States  
T: 847-779-5000  
F: 847-655-6062  
Email: [info@autroltransmitters.com](mailto:info@autroltransmitters.com),



Doc # APT3100.DS.ver010110

1



USKON AKIŞKAN KONTROL SİSTEMLERİ SANAYİ VE TİCARET LTD. ŞTİ.

Kemankeş Kara MustafaPaşa Mah. Ağaç Tulumba Sok. No: 4/A Karaköy / İstanbul Tel: +90 (212) 251 05 05 Fax: +90 (212) 251 05 79 [info@us-kon.com.tr](mailto:info@us-kon.com.tr)

## SMART PRESSURE TRANSMITTER



"Autrol America Inc. (AAI) range of transmitters includes a complete range of "intelligent" high performance transmitters for Temperature, Gauge, Absolute, Vacuum & Differential pressure measurements for standalone monitoring and/or closed loop control applications. These "intelligent" microprocessor-based "Smart" transmitters features a two-wire loop powered 4 to 20mA current outputs with "Digital" HART as standard (Foundation Fieldbus optional) communication(s) for seamless integration with a host control system such as DCS, PLC, SCADA, AMS, PDM and/or a local Hand Held Communicator(HHC)."

### Description of Product

The APT3100 series of smart transmitters have excellent stability, high accuracy and include features that facilitate easy installation, start up and minimum maintenance thereby lowering process downtime and overall cost of ownership in the long run.

Autrol transmitters are equipments with analog (4/20mA- 2 wire) and digital (HART or Foundation Fieldbus) communication protocols for seamless integration with a host Control System such as DCS, PLC, SCADA, AMS, PDM and/or Hand Held Communicator (HHC). Through Digital HART Protocol one can easily acquire process measured variable, configure and modify its various Parameters (Range, Tag Name and Damping, Transfer Function, Trimming).

These transmitters are equipped with an automatic temperature compensation function integrated into its advanced signal processing circuitry to ensure high reliability and performance corresponding to change of ambient temperature.



### Features

- Superior Performance
- High Reference Accuracy : $\pm 0.075\%$  of Calibrated Span
- Long-Term Stability
- High Rangeability ( 100 : 1 )
- Flexibility
- Data Configuration with HART Configurator
- Zero Point Adjustment
- Reliability
- Continuous Self-Diagnostic Function
- Automatic Ambient Temperature Compensation
- Fail-mode Process Function
- EEPROM Write Protection
- CE EMC Conformity Standards(EN5081-2, EN50082-2)

### Function

- Flexible Sensor Input : DP, GP, AP, Vacuum
- Various Output : 4 ~20mA , Digital Signals
- Setting Various Parameters : Zero/Span, Trim, Unit, Fail-mode, etc
- Self Diagnostic Function : Sensor, Memory
- A/D Converter, Power, etc
- Digital Communication with HART protocol
- Explosion-proof Approval & Intrinsic Safety Approval : KOSHA, KTL, CSA,FM, ATEX

For application support, quotations, pricing and lead times please contact our sales department directly at [sales@autroltransmitters.com](mailto:sales@autroltransmitters.com). Additional details including product technical specifications can be found online at [www.autroltransmitters.com](http://www.autroltransmitters.com)

Doc # APT3100.DS.ver010110



## SMART PRESSURE TRANSMITTER

**TRUE SMART**

The heart of Autrol smart transmitter is a microprocessor-based high performance module. In addition, each transmitter is ambient temperature characterized using state-of-art technologies to ensure maximum transmitter accuracy and minimized drift over a wide range of operating temperatures.

On integrated sensor models such as in APT3100 series transmitters the characteristics data of its sensor are stored in internal non-volatile EEPROM to minimize measuring error. On non sensor transmitter models such as ATT2100 temperature transmitters, it has a linearization table built in wherein user can modify the various necessary values in field per the added temperature sensor (RTD or T/C) characteristics to get better accuracy from the overall measurement system. Its integral microprocessor module then automatically converts the required value referring to the customized linearization table.

All transmitters include advanced self diagnostic functions for detecting any malfunctions of sensor and/or fault of A/D converter, internal memory and microprocessor. All diagnostic/error status is transmitted to a connected Master by analog current signal (fail mode current 3.75mA or 22mA) or digital HART (or FF) communication.

The transmitters have Last Value Status (L V S) function for safety of instrumentation. When the sensor input occurs in abnormal status, output is fixed to the previous value and when the recovery to normal status, output is updated to the current value. If abnormal status of sensor is being continued during the defined interval, the fault is recognized as a sensor failure & reported accordingly for corrective action.

**OPEN ARCHITECTURE**

Using a Device Master (AMS, PMD etc) or a hand-held terminal, PC configuration program or HART Compatible DCS, PLC or SCADA the user can change, modify and review parameters of smart transmitter through HART communication. There functions provide convenience for your calibration and maintenance practice.

**FIELD PROGRAMMABLE**

All Autrol transmitter have a fully programmable front panel from which users can directly input values ( e.g. range, zero/span, sensor type, thermocouples, RTD and mV and automatic temperature compensation) to reduce cost of installation and commissioning eliminating need of a additional configuration tools.

**Stable Measurable Accurate Reliable Transmitters**

For application support, quotations, pricing and lead times please contact our sales department directly at sales@autroltransmitters.com. Additional details including product technical specifications can be found online at www.autroltransmitters.com

Doc # APT3100.DS.ver010110





## SMART PRESSURE TRANSMITTER

### Electronics Module

The Electronics module consists of a circuit board sealed in an enclosure. There is a MCU module, a power module, an analog module, a LCD module and a terminal module included within the transmitter.

The MCU modules acquire the digital value from the analog module and apply correction coefficients selected from EEPROM. The output section of the power module converts the digital signal to a 4~20 mA output. The MCU module communicates with the HART-based Configurator or Control Systems such as DCS. The Power modules have a DC-to-DC Power conversion circuit and an Input/output isolation circuit. An optional LCD module plugs into the MCU module and displays the digital output in user-configured unit.

### Sensor Inputs

The model APT3100-D, G, H is available in a differential pressure sensor of a capacitance type. The capacitance pressure sensor measures differential and gauge pressure and is commonly used in flow and level applications. Both sides in the capacitance sensor transmit process pressure from the process isolators to the sensor.

The model APT3100-A is available in an absolute pressure sensor of a piezo-resistive type and measures absolute pressure.

The sensor module converts the capacitance or the resistance to the digital value. The MCU module calculates the process pressure based on the digital value.

The sensor modules include the following features  
+/-0.075%accuracy, the most accurate sensor in the industry.

The software of the transmitter compensates for the thermal effects, improving performance.

Precise Input Compensation during operation is achieved with temperature and pressure correction coefficients that are characterized over the range the transmitter and stored in the sensor module EEPROM memory. EEPROM stores sensor information and correction coefficients separately from MCU module, allowing for easy repair, reconfiguration and replacement

### Basic Setup

APT3100 Pressure transmitter can be easily configured from any host that supports the HART protocol.


- Operational Parameters
- Operational Parameters.
- 4~20mA Points (Zero/Span)
- Engineering Units
- Damping Time: 0.25 ~ 60 sec
- Tag: 8 alphanumeric characters
- Descriptor: 16 characters
- Message: 32 characters.
- Date: day/month/year

### Calibration and Trimming

- Lower/Upper Range (zero/span)
- Sensor Zero Trimming
- Zero Point Adjustment
- DAC Output Trimming
- Transfer Function
- Self-Compensation

### Self-Diagnosis and Others

- CPU & Analog Module Fault Detection
- Communication Error
- Fail-mode Handling
- LCD Indication
- Temperature Measurement of Sensor Module

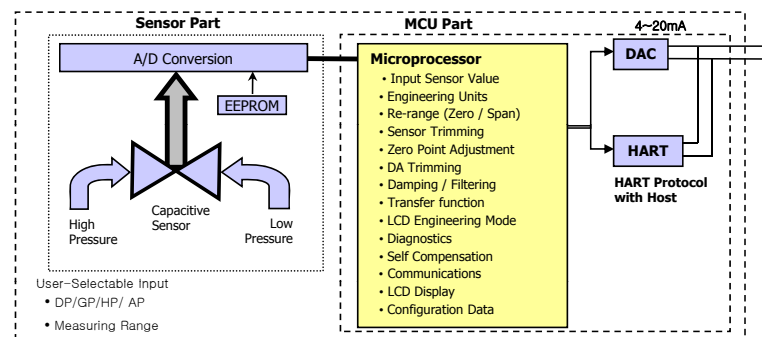

For application support, quotations, pricing and lead times please contact our sales department directly at sales@autroltransmitters.com. Additional details including product technical specifications can be found online at www.autroltransmitters.com

Doc # APT3100.DS.ver010110



## SMART PRESSURE TRANSMITTER

**Range and Sensor Limits**

Refer to Table 1

**Zero and Span Adjustment Limits**

Zero and span values can be set anywhere within the range limits stated in Table 1.

Span must be greater than or equal to the minimum span stated in Table 1

**Output (Analog Current and Digital Data)**

Two wire 4~20mA user-configurable for linear or square root output, digital process value superimposed on 4~20mA signal, available to any host that conforms to the HART protocol

**Power Supply & Load Requirement .****External power supply required**

Transmitters operate on 11.9 to 45 V dc.

\* 250 ohm load-- 17.4 Vdc

\* Up to a 550 ohm load -- 24 Vdc

Max. Loop Resistance =  $(E - 11.9)/0.022$

(E = Power Supply Voltage)

**Supply Voltage**

11.9 ~ 45 Vdc -- operation

17.4 ~ 45 Vdc -- HART

Communications

11.9 ~ 42 Vdc -- CSA Approval

**Loop Load**

0 ~ 1500 ohm – Operation

250 ~ 550 ohm -- HART Communications

**EMC Conformity Standards**

EMI (Emission) – EN50081-2:1993

EMS (Immunity) – EN50082-2:1995

**Update Time and Turn-On Time Update**

Time : 0.12 seconds

Turn-On Time : 3 seconds

**Failure Mode**

Fail High : Current  $\geq$  21.75 mA

Fail Low : Current  $\leq$  3.75 mA

**Storage Temperature** -40 to 85 (without condensing)**Process Temperature Limits**

(Range codes and approval codes may affect limits)

-40 to 120 ( -40 to 248 )

**Isolation**

Input/output isolated to 500Vrms (707 Vdc)

**Working Pressure Limits (silicone oil)**

Model DP & GP 0 ~ 13.79 MPa ----- # 3 ~ 8

Model GP 0 ~ 80.00 MPa ----- # 9

0 ~ 80.00 MPa ----- # 0

Model HP 0 ~ 3 1.02 MPa ----- # 4 ~ 7

Model AP 0 ~ 700 KPa ----- # 4

0 ~ 4000 KPa ----- # 5

0 ~ 7000 KPa ----- # 6

**Hydrostatic Test Pressure**

Model DP 3000 psi (20.7 MPa)

Model HP 6750 psi (46.5 MPa)

Model GP 2000 psi (13.8 MPa) -- # 3 ~ 8

11600 psi (80.0 MPa) --- # 9

11600 psi (80.0 MPa) --- # 0

Model AP 101.5 psi (700 KPa) --- # 4

218 psi (4000 KPa) --- # 5

1015 psi (7000 KPa) --- # 6

**Burst Pressure**

Model DP, GP & HP 10000 psi (68.9MPa)

Model AP 2000 psi (13.8MPa)

**5 Digits LCD**

Expresses all pressure unit and flow unit in 5 digits.

Select decimal place (0 to 4)



For application support, quotations, pricing and lead times please contact our sales department directly at sales@autroltransmitters.com. Additional details including product technical specifications can be found online at www.autroltransmitters.com

Doc # APT3100.DS.ver010110



## SMART PRESSURE TRANSMITTER

**Physical Specifications****Wetted Materials**

Isolating Diaphragms ----316L SST, Monel,  
Tantalum, HAST-C  
Drain/Vent Valves -----316 SST, HAST-C  
Flanges and Adapters----316 SST, HAST-C  
O-ring -----Viton, PTFE)

**Non-wetted materials**

Fill Fluid -----Silicone oil or Inert fill  
Bolts -----Stainless Steel  
Electronics Housing ----Aluminum, Flameproof  
and Waterproof (IP67)  
Cover O-ring -----Buna-N  
Paint -----Epoxy-Polyester or  
Polyurethane  
Mounting Bracket -----2-inch Pipe, 304 SST,  
Painted  
Carbon Steel with 304 SST U-bolt  
Nameplate -----304 SST

**Electrical connections**

1/2-14 NPT conduit with M4 Screw Terminals

**Process Connections**

1/4-18 NPT on 2.126 inch (54.0 mm) centers on  
flanges for Standard  
1/2-14 NPT on Process Adapter (option) *Refer to  
drawing in the last page*

**Weight**

3.9 kg (excluding options)

**Hazardous Location Certifications (option)****CSA** (Canadian Standards Association) Approvals**C1** Code:

"SEAL NOT REQUIRED"

Explosion proof for Class I, Division 1,  
Groups A, B, C & D

Dust-ignition proof for Class II, Division 1,  
Groups E, F & G; Class III

Flameproof for Class I, Zone 1: Ex d IIC

"T6, See In struction for temperature code if process  
temperature above 85 °C"

Class I, Division 2, Groups A, B, C, and D;

Class II, Division 2, Groups E, F, G;

Class IIIT4

Non sparking Equipment for Class I Zone 2:

Ex nA IIC T4

Enclosure: Type 4x, IP66

Power Supply: 11.9 to 42 Vdc Max.

Output Signal: 4 to 20 mA + HART

Ambient Temp. : -20 to 60 °C

**KOSHA Approvals** (KOSHA: Korea Occupational Safety & Health Agency)**K1** Code:

Flameproof for Class I, Zone 1: Ex d C T6, IP67

Ambient Temperature: -20 to 60 °C

Max. Process Temperature: 80 °C

Power Supply: Max. 45 Vdc

Output: 4 to 20 mA + HART, Max. 22 mA

**KTL Certification** (KTL: Korea Testing Laboratory)**K2** Code:

Intrinsic Safety: Ex ia IIC T5

Ambient Temperature: -20 to 60 °C

Max. Process Temperature: Max. 100 °C

Entity Parameter: Umax=40Vdc, IMAx=165mA,

Pmax = 0.9W

**FM** (Factory Mutual explosion proof) Approvals**F1** Code:

Explosion proof for Class I, Division 1  
Groups A, B, C and D

Dust-ignition proof for Class II, Division 1,  
Groups E, F and G

Dust-ignition proof for Class II, Division 1

"T6, see instruction for temperature code if  
process temperature above 85°C"

Ambient Temperature: -20 to 60°C

Enclosure: indoors and outdoors, NEMA Type 4X

Conduit seal required within 18" for Group A only.

Nonincendive for Class I, Division 2, Groups A, B,  
C & D

Class II, Division 2, Groups E, F & G; and Class  
III, Division 1,

Temperature Code T4

Ambient Temperature: -20 to 60°C

Enclosure: indoors and outdoors, NEMA Type 4X

**ATEX Approvals****E1** Code:

ATEX Certificate number: KEMA07ATEX0103

CE0344  II 2 G Ex d IIC T6 or T5

Operating Temperature: -20°C ≤ Tamb ≤ +60°C

T6 for process < 85°C; T5 for process < 100°C

For application support, quotations, pricing and lead times please contact our sales department directly at sales@autroltransmitters.com. Additional details including product technical specifications can be found online at www.autroltransmitters.com

Doc # APT3100.DS.ver010110



## SMART PRESSURE TRANSMITTER

### General Specifications

(Rangeability: #2=20:1 / #3=50:1 / 4~0=100:1)

#### 1) APT3100 Pressure Sensor Range & URL

Range Code	DP/GP/HP					AP	
	Calibrated Span (KPa)	Upper Range (URL) (KPa)	Lower Range (LRL) (KPa)			Calibrated Span (KPa)	Range (KPa)
			D.P	G.P	H.P		
2	0.075~1.5	1.5	-1.5	-1.5	NA	NA	NA
3	0.15~7.5	7.5	-7.5	-7.5	NA	NA	NA
4	0.373~37.3	37.3	-37.3	-37.3	-37.3	2~250	0~250
5	1.865~186.5	186.5	-186.5	-100	-186.5	10~1500	0~1500
6	6.9~690	690	-690	-100	-690	20~2500	0~2500
7	20.68~2068	2068	-2068	-100	-2068	NA	NA
8	68.95~6895	6895	-6895	-100	NA	NA	NA
9	206.8~20680	20680	NA	-100	NA	NA	NA
0	413.7~41370	41370	NA	-100	NA	NA	NA

#### 1 E

Range Code	KPa	Kg/cm <sup>2</sup>	bar	psi	inH <sub>2</sub> O@4°C	mmH <sub>2</sub> O@4°C	inHg@0°C
2	1.5	0.015	0.015	0.217	6	152	0.442
3	7.5	0.076	0.075	1.087	30	765	2.215
4	37.3	0.38	0.373	5.410	149	3804	11.014
5	186.5	1.902	1.865	27.049	749	19018	55.072
6	690	7.036	6.900	100.073	2773	70361	203.750
7	2068	21.088	20.680	299.930	8310	210878	610.660
8	6895	70.309	68.950	1000.009	27708	703097	2036.025
9	20680	210.876	206.800	2999.303	83105	2108781	6106.597
0	41370	421.856	413.700	6000.211	166085	4218566	12216.550

#### 2) Electrical Specifications

Power Supply	11.9 ~ 45 Vdc	Output Signal	4 ~ 20 mA dc/HART
HART loop resistance	250 ~ 550 ohm	Isolation	500 ms (707 Vdc)

#### 3) Performance Specifications

Reference Supply	± 0.075% of Span (0.1URL ≤ Span ≤ URL) ± [0.025 + 0.005x(URL/Span)]% of Span (0.01URL ≤ Span < 0.1URL)	Ambient Temperature	-40 ~ +85
		LCD Meter Ambient Temp.	-30 ~ +80
Ambient Temp. Effect	± [0.019%URL + 0.125% Span] / 28	Humidity Limits	5% ~ 100% RH
Stability	± 0.125% URL for 12 Months	Process Temperature Limits	-40 ~ +120
Static Pressure Effects	± 0.1% of URL per 7MPa (Zero Error) ± 0.2% of Reading per 7MPa (Span Error)	Power Supply Effects	± 0.005% of Span per Volt
		Mounting Position Effects	Zero Shift up to 350Pa No Span Effect

#### 4) Physical Specifications

Isolating Diaphragm	316L SST	Process Connection Size	1/4 - 18 NPT
Drain & Vent Valve	316 SST	( Adapter - Option)	1/2 - 14 NPT
Flange & Adapter	316 SST	Electrical Connections	1/2 - 14 NPT with M4
O-ring	Viton, PTFE	Weight (excluding Option Items)	3.9 Kg
Electronic Housing	Aluminum	2" Pipe Stanchion Type bracket	Angle or Flat type
Bolts & Bolting Flange	304 SST	Housing Class	Waterproof (IP67), 4X, IP66

#### 5) Hazardous Location Certifications (option)

Korea Standards Approval	Overseas Standards Approval
Flameproof Approval : Ex d IIC T6 (KOSHA) Intrinsic Safety Approval : Ex ia IIC T5 (KTL)	CSA Explosion proof Approval FM Explosion proof Approval ATEX Flame proof Approval

For application support, quotations, pricing and lead times please contact our sales department directly at sales@autroltransmitters.com. Additional details including product technical specifications can be found online at www.autroltransmitters.com

Doc # APT3100.DS.ver010110



## SMART PRESSURE TRANSMITTER

### Ordering Information

Model	Code	Description					
APT3100	D	Differential Pressure Transmitter (Static Pressure 13.79 MPa / 2000psi)					
	G	Gauge Pressure Transmitter					
	H	Differential Pressure Transmitter for High Line Pressure (Static Pressure 31.02MPa / 4500psi )					
	A	Absolute Pressure Transmitter					
Ranges		<b>DP/GP/HP</b>				<b>*AP</b>	
		<b>Calibrated Span Min. to Max</b>	<b>Lower Range Limit</b>			<b>Upper Range Limit</b>	<b>Range</b>
			<b>APT3100-D</b>	<b>APT3100-G</b>	<b>APT3100-H</b>		
	2	0.075 ~ 1.5 Kpa (0.302~6.022 inH2O)	-1.5 Kpa (-6.022 in H2O)	-1.5 Kpa (-6.022 in H2O)	NA	1.5 Kpa (6.022 in H2O)	NA
	3	0.15 ~ 7.5 Kpa (0.6~30 inH2O)	-7.5 Kpa (-30 inH2O)	-7.5 Kpa (-30 inH2O)	-7.5 Kpa (-30 inH2O)	7.5 Kpa (30 inH2O)	NA
	4	0.373 ~ 37.3 KPa (1.5~150 in H2O)	-37.3 KPa (-150 inH2O)	-37.3 KPa (-150 inH2O)	-37.3 KPa (-150 inH2O)	37.3 KPa (150 inH2O)	NA
	5	1.865 ~ 186.5 KPa (7.5~750 inH2O)	-186.5 KPa (-750 inH2O)	-100KPa (-14.6 psi)	-186.5 KPa (-750 inH2O)	186.5 KPa (750 inH2O)	0~200 KPa
	6	6.9 ~ 690 KPa (1~100 psi)	-690 KPa (-100 psi)	-100KPa (-14.6 psi)	-690 KPa (-100 psi)	690 KPa (100 psi)	0~1000 KPa
	7	20.68 ~ 2068 KPa (3~300 psi)	-2068 KPa (-300 psi)	-100KPa (-14.6 psi)	-2068 KPa (-300 psi)	2068 KPa (300 psi)	0~2000 KPa
	8	68.95 ~ 6895 Kpa (10~1000 psi)	-6695 KPa (-1000 psi)	-100KPa (-14.6 psi)	NA	6895 Kpa (1000 psi)	NA
	9	206.8 ~ 20680KPa (30~3000 psi)	NA	-100KPa (-14.6 psi)	NA	20680 KPa (3000 psi)	NA
0	413.7 ~ 41370 KPa (60~6000 psi)	NA	-100KPa (-14.6 psi)	NA	41370 KPa (6000 psi)	NA	
X	Special						
Mounting Flange/ Material		Body		Vent Plug	Diaphragm		
	M11	316 SST		316 SST	316L SST		
	M12	316 SST		316 SST	HAST - C		
	M13	316 SST		316 SST	Monel		
	M14	316 SST		316 SST	Tantalum		
	M21	HAST-C		HAST-C	HAST - C		
	M22	HAST-C		HAST-C	Monel		
	M23	HAST-C		HAST-C	Tantalum		
Approvals	K0	Maker Standard (Waterproof : IP67 )			E1	ATEX(KEMA) Flameproof	
	K1	KOSHA Flameproof Approval : Ex d IIC T6			*E2	ATEX(KEMA) Intrinsic Safety	
	*K2	KTL Intrinsic Safety Approval : Ex ia IIC T5			F1	FM/FMC Explosion proof for (USA & Canada)	
	*F2	FM Intrinsic Safety					
Fill Fluid	1	Silicone (DC200)		*2	Inert fill fluid (Halocarbon Oil)		
Process Connection	S	1/4 - 18 NPT (Standard)		O	1/2 - 14 NPT Female Adapter)	X Special	
Electrical Connection	1	1/2-14NPT Epoxy-Polyester Painted Aluminum		2	G1/2 Epoxy-Polyester Painted Aluminum	X Special	
Option	M1	LCD Indicator(5digit)					
	MP	Multi-Planar					
	LP	Lighting Protector (Internal Type)					
	K	Oil Free Finish					
	F1	Side Vent / Drain Top					
	F2	Side Vent / Drain Bottom					
	2W	2 Way Manifold (SST)					
	3W	3 Way Manifold (SST) Add Remark "Remote Type"					
	5W	5 Way Manifold (SST) Add Remark "Remote Type"					
	BA	Stainless Steel Bracket (Angle type) with SST Bolts					
	BF	Stainless Steel Bracket (Flat type) with SST Bolts					
ST	Stainless Steel (SUS 316) Housing						
T	Teflon O-Ring (Wetted Part)						

**Example: APT3100-D5-M11-C1-1-S-1-M1-W-BA**

Note 1: Request manufacturer for Draft Range, Absolute (small pressure and vacuum) and Items marked "\*" before order.

For application support, quotations, pricing and lead times please contact our sales department directly at sales@autroltransmitters.com. Additional details including product technical specifications can be found online at www.autroltransmitters.com

Doc # APT3100.DS.ver010110







## SMART PRESSURE TRANSMITTER

## Installation with mounting bracket

2" Pipe Mounting Bracket Model Angle Type

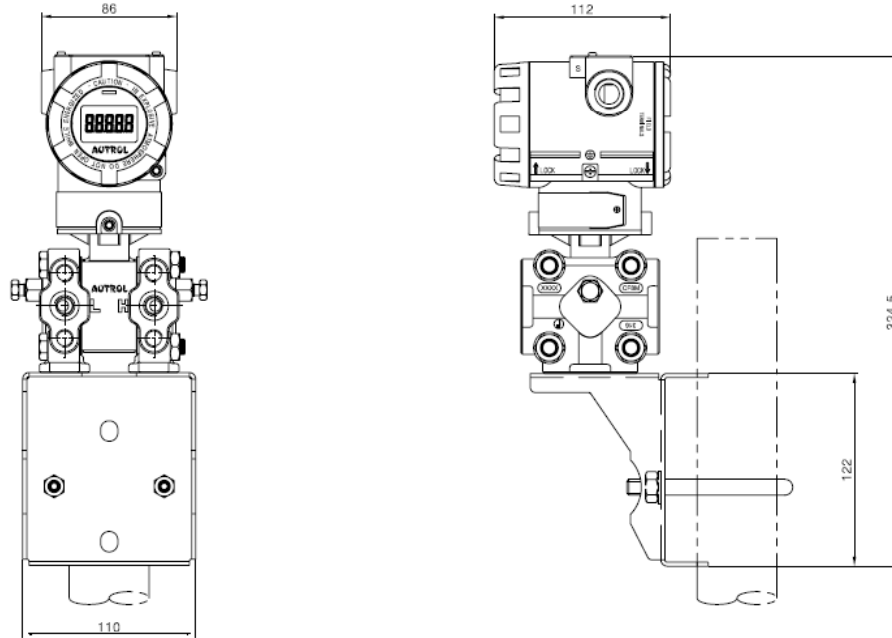

2" Pipe Mounting Bracket Model Flat Type

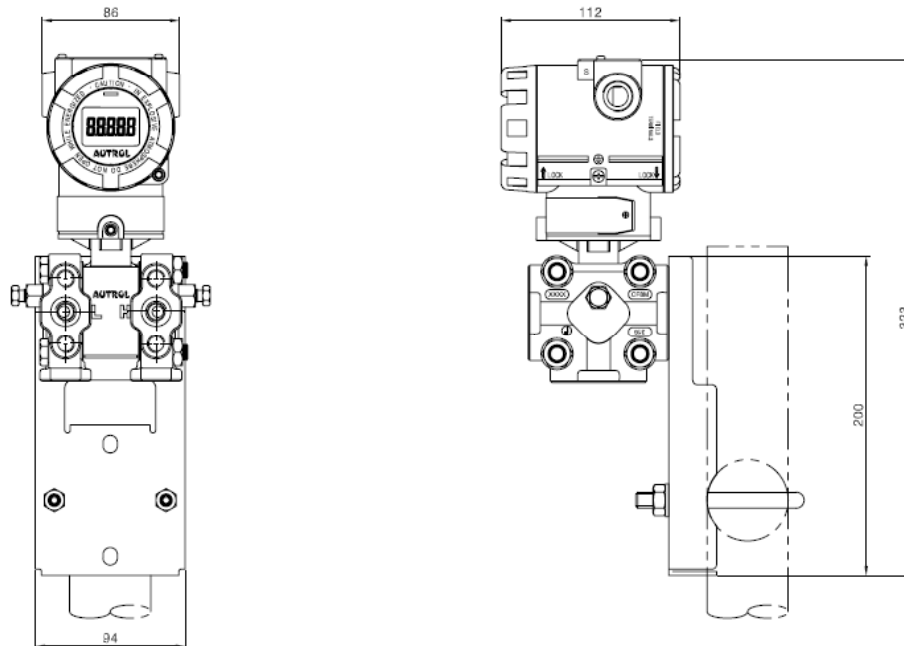


For application support, quotations, pricing and lead times please contact our sales department directly at [sales@autroltransmitters.com](mailto:sales@autroltransmitters.com). Additional details including product technical specifications can be found online at [www.autroltransmitters.com](http://www.autroltransmitters.com)

Doc # APT3100.DS.ver010110




## SMART PRESSURE TRANSMITTER

### Connection Diagram of Signal, Power, HHT for Transmitter

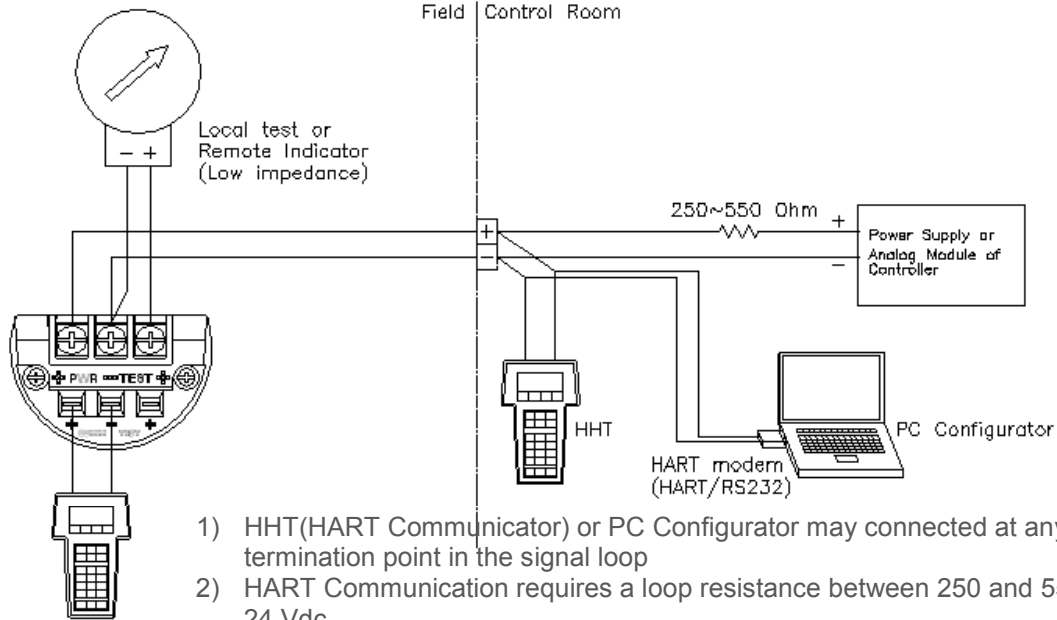

- 1) HHT(HART Communicator) or PC Configurator may connected at any termination point in the signal loop
- 2) HART Communication requires a loop resistance between 250 and 550 ohm @ 24 Vdc
- 3) Transmitter operates on 11.9 to 45.0 Vdc transmitter terminal voltage.  
[ Applied Power ]
  - \* 11.9 ~ 45.0 Vdc for General Operation
  - \* 17.4 ~ 45.0 Vdc for HART Communication
  - \* 17.4 ~ 42.0 Vdc for CSA Approval (Power supply must not exceed 42.0 Vdc)

### Dimensions of Transmitter (mm)

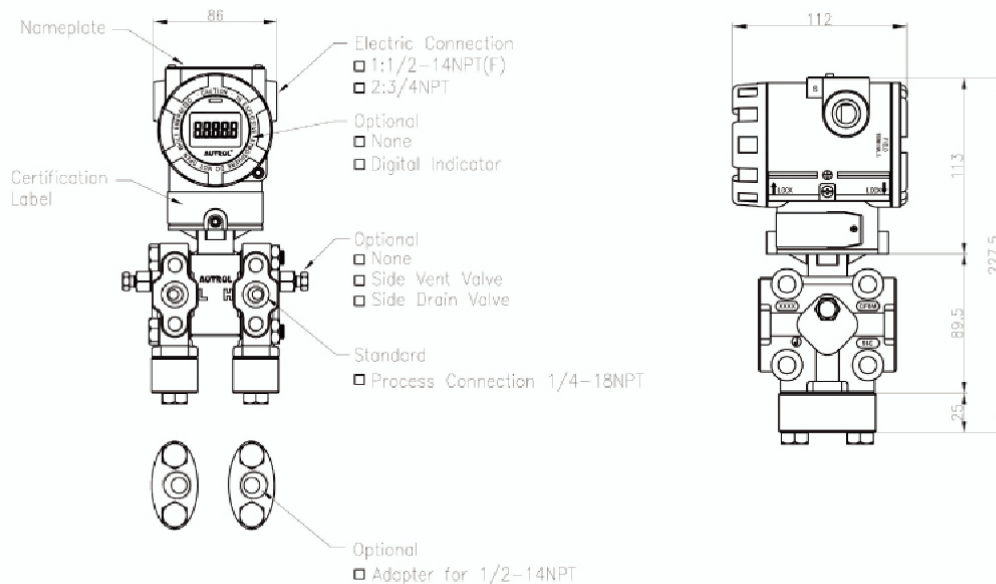

For application  
sales@autroltr  
www.autroltr  
Doc # APT310

**UTROL®**  
**nerica**  
SMITTERS

