



USKON 2/2 Yollu Piring Dişli Küresel Vana

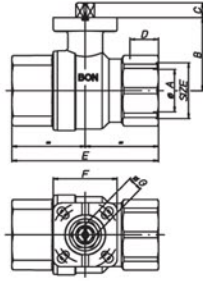

Ball valve, full bore, female/female, with DIN ISO 5211 connection for actuator, nickel-plated.

SIZE	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"
øA pass./bore	8	10	15	20	25	32	40	50	63
B mm	38	38	38	40,5	44	55	61,5	73	82,75
C mm	9	9	9	9	9	11	11	14	15,5
D mm	15	15	15	16,3	19,1	21,4	21,4	25,7	30,2
E mm	75	75	75	80	90	110	120	140	155
F mm	37	37	37	37	37	48	48	48	68
øG mm	9	9	9	9	9	11	11	14	14
SW mm	26	26	26	32	41	50	55	70	83
ISO FLANGE	F3	F3	F3	F3	F3/F4	F4/F5	F4/F5	F5	F7
Peso/Weight gr.	412	390	342	463	705	1220	1650	2888	3285

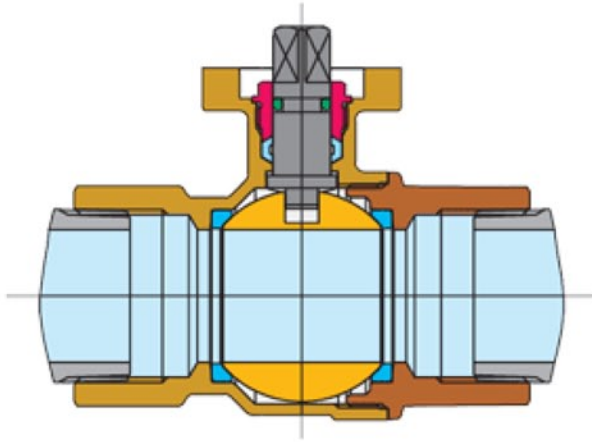


MATERIAL SPECIFICATION


1	BODY CW 617 N UNI EN 12165
2	END ADAPTER CW 617 N UNI EN 12165
3	BALL CW 614 N UNI EN 12164
4	BALL GASKETS P.T.F.E
5	STEM CW 614 N UNI EN 12164
6	O-RING ELASTOMER
7	GLAND CW 614 N UNI EN 12164
8	THRUST WASHER P.T.F.E
9	STEM GASKET P.T.F.E

TECHNICAL FEATURES AND USES

Pressure/temperature diagram
(test carried out with water)

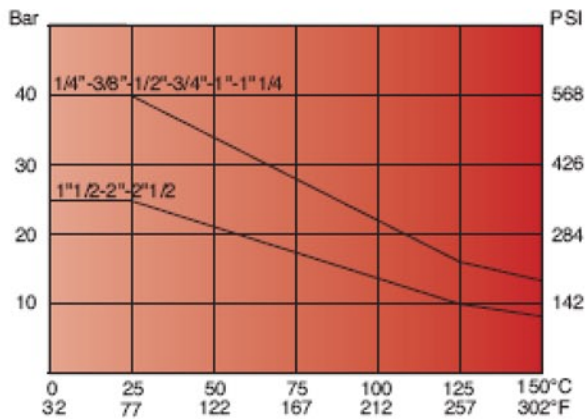

Loss of head diagram
(for water applications)

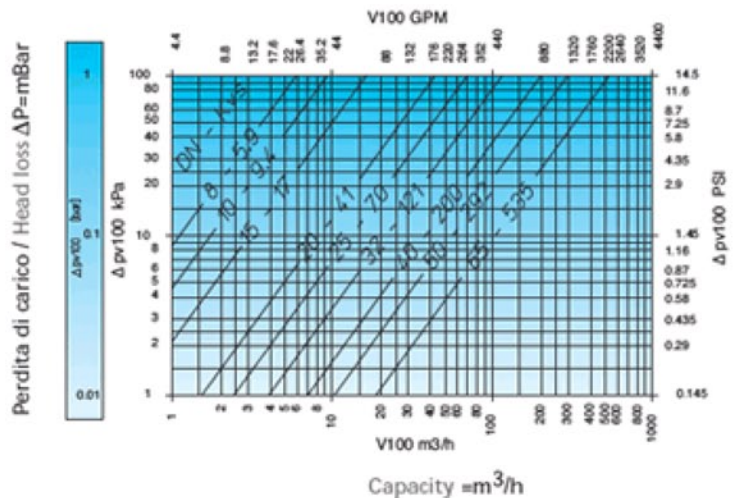

USKON AKIŞKAN KONTROL SİSTEMLERİ SANAYİ VE TİCARET LTD. ŞTİ.

Kemankeş Kara MustafaPaşa Mah. Ağaç Tulumba Sok. No: 4/A Karaköy / İstanbul Tel: +90 (212) 251 05 05 Fax: +90 (212) 251 05 79 info@us-kon.com.tr