


No	Part	Material
1	Gauge	Stainless Steel
2	Upper Cover	Stainless Steel AISI 316
3	U-ring	VITON
4	Piston	Stainless Steel AISI 316
5	Valve Gasket	VITON
6	Piston Stem	Stainless Steel AISI 316
7	Body	Stainless Steel AISI 316
8	Diaphragm	VITON
9	Seal Ring	VITON
10	Spring	Stainless Steel
11	Bonnet	Stainless Steel AISI 316
12	Washer	Brass
13	Regulator Screw	Stainless Steel AISI 316

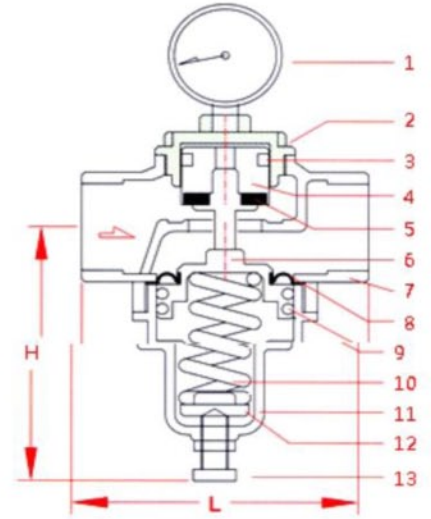

- Maximum Inlet Pressure: 25 kgf/cm<sup>2</sup>
- Maximum temperature: 200°C
- Outlet pressure 1 - 6 bar or 4 - 10 bar

DN	G	h1	h2	b	Kvs Değeri (m <sup>3</sup> /h)	Max. Çalışma Basıncı		Ağırlık (Kg)
						BAR 75 °C		
15	1/2"	182	47	85	1,2	25 BAR		0,8
20	3/4"	182	47	85	1,3	25 BAR		1
25	1"	201	55	95	1,6	25 BAR		1,2
32	1 1/4"	324	61	104	4,2	25 BAR		2,2
40	1 1/2"	331	61	108	4,5	25 BAR		4,5
50	2"	349	72	147	7,2	25 BAR		3,1